

TEXCARE SRN 260 TERRA

Technical Data Sheet

TEXCARE SRN 260 TERRA

Nonionic Soil Release Polyester for household and industrial products

Chemical name	Bio poly ethyleneglycol propyleneglycol oligo ester
----------------------	---

Product properties ¹

Appearance (20°C)	Clear to lightly turbid liquid, light yellow
--------------------------	--

Chemical and physical data

Active substance	Approx. 60 %
pH (20°C, 50 g/L aq.)	Approx. 4.5
Viscosity	Approx. 1500 mPa·s
Renewable Carbon Index (RCI)	80%

Profile

TexCare SRN 260 Terra is a nonionic soil release polyester which was developed especially for application in liquid detergents and cleaners. Due to its nonionic character, TexCare SRN 260 Terra exhibits a broad tolerance to the most common surfactant systems.

Publisher
Rothausstrasse 61
4132 Muttenz
Switzerland

Copyright ©
Clariant International Ltd, 2025

Contact
BU INDUSTRIAL & CONSUMER
SPECIALTIES
www.ics.clariant.com
www.clariant.com

Issue
February 2022

¹ These characteristics are for guidance only and not to be taken as product specifications. The tolerances are given in the product specification sheet. For further product properties, specifications, safety, and ecological data, please refer to the MSDS.

Soil Release Effect

Fabrics made from polyester and polyester/cotton can be difficult to clean when they are soiled with oily or fatty stains. Such stains adhere strongly to the hydrophobic synthetic fibres, which are then only poorly wetted by the washing liquor.

If these fabrics are washed with a detergent containing a soil release polymer from the TexCare series, e.g. TexCare SRN 260 Terra, the soil release polyester is adsorbed onto the hydrophobic fibres and forms a hydrophilic film. This prevents the soil from adhering directly to the fibres. Furthermore, the affinity of hydrophobic soils for the hydrophilic film is reduced significantly compared to the untreated fibres. This makes it much easier to remove oily stains from the fabric during subsequent washing.

The soil release effect was tested on polyester using dirty motor oil as a model soil.

The polyester swatches were pre-washed with two different mild and eco-friendly laundry liquids (Formulation 1 + Formulation 2) containing either no soil release polymer or 0.4% active TexCare SRN 260 Terra.

Formulation 1

Genapol LRO Paste (SLES 2 EO)	12% active
Genapol LA 070 (Laureth-7)	3% active
GlucoPure Sense (Sunfloweroyl Methylglucamide)	3% active
Soap	2% active
TexCare SRN 260 Terra	0.4 % active

NaOH was used to adjust the pH to 7.5.

With 2% citrate, the final viscosity of the formulation was 700 mPas.

Formulation 2

Genapol LRO Paste (SLES 2 EO)	6% active
Genapol LA 070 (Laureth-7)	12% active
Soap	2% active
TexCare SRN 260 Terra	0.4 % active

NaOH was used to adjust the pH to 7.6.

With 2% citrate, the final viscosity of the formulation was 420 mPas.

The swatches were stained with dirty motor oil, dried for 2 hours and washed again without polymer or TexCare SRN 260 Terra. The results of a colorimetric evaluation and the appearance of the swatches are shown in Fig. 1.

Publisher

Rothausstrasse 61
4132 Muttenz
Switzerland

Copyright ©

Clariant International Ltd, 2025

Contact

BU INDUSTRIAL & CONSUMER
SPECIALTIES
www.ics.clariant.com
www.clariant.com

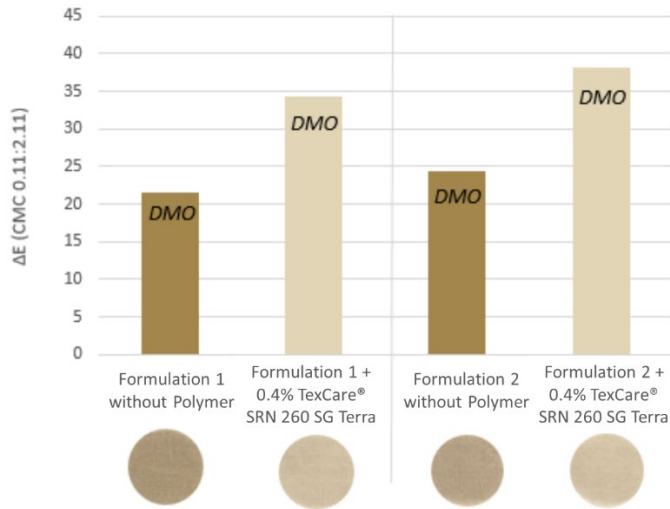


Fig. 1: Improvement of soil removal using TexCare SRN 260 Terra on polyester. Frontloading washing machine, 40°C, 4.3 g/L liquid detergent

Primary Detergency

A further benefit of TexCare SRN 260 SG Life is the improvement of primary detergency on oily and greasy soils. Even without a first prewash of the fabric to give it a soil release finish, soil is removed better from polyester and polyester/cotton. Fig. 2 shows the results of washing soiled polycotton swatches with a variety of soils at 40°C with a standard liquid detergent containing 1% active TexCare SRN 260 Terra.

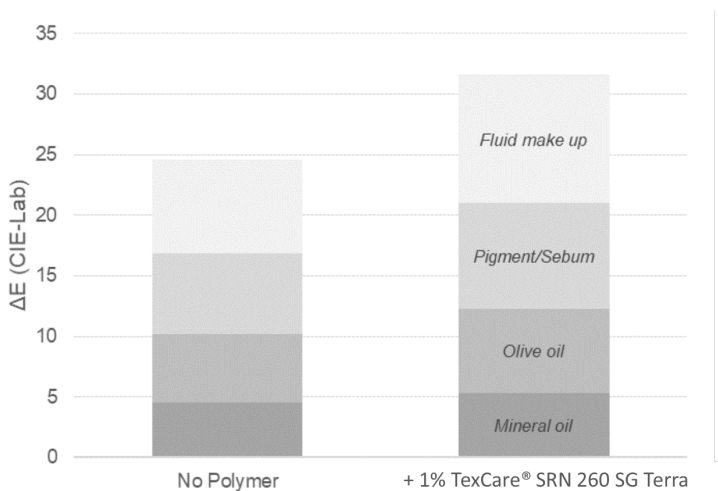


Fig. 2: Improvement of primary detergency using TexCare SRN 260 Terra on polycotton. Frontloading washing machine, 40°C cotton cycle, 4.3 g/L liquid detergent.

Anti-Redeposition

Lime soap and various soils present in the washing liquor need to be dispersed in order to avoid redeposition onto the fabrics present. A detergent which poorly fulfills this requirement will lead to greying of the washed garments. Due to its amphiphilic structure, TexCare SRN 260 Terra can effectively aid in the dispersion of this soil and prevents redeposition through repelling soil from the polyester fabric surface. Fig. 3 shows images of polycotton swatches washed with a 5% carbon black in olive oil mixture dosed at 0.08 g/L.

Publisher
Rothausstrasse 61
4132 Muttenz
Switzerland

Copyright ©
Clariant International Ltd, 2025

Contact
BU INDUSTRIAL & CONSUMER
SPECIALTIES
www.ics.clariant.com
www.clariant.com

As Fig. 3 shows, the inclusion of small amounts of TexCare SRN 260 Terra can lead to large improvements in anti-redeposition performance.

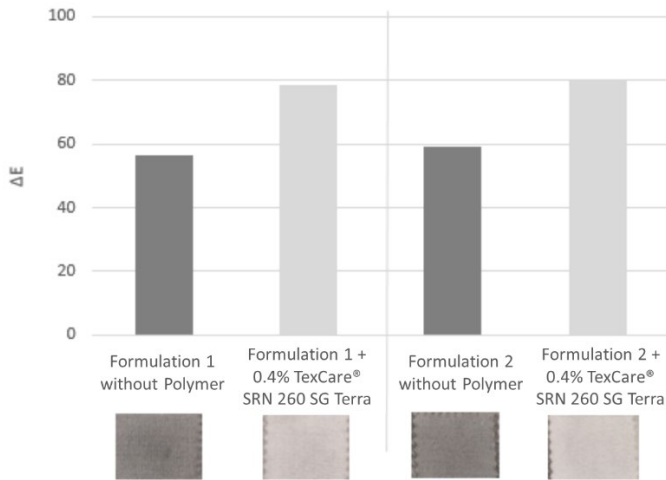


Fig. 3: Improvement of anti-redeposition of a liquid detergent through inclusion of 0.4% a.m. TexCare SRN 260 Terra on polycotton. Tergotometer, 25°C for 30 min, 2 g/L liquid detergent, 0.08 g/L olive oil-carbon black soil.

Hydrophilization

Wear comfort of clothes is a very important topic for consumers. Compared to hydrophilic cotton fabrics, vapour cannot pass through hydrophobic standard polyester fabrics, which leads to an unpleasant wear comfort. By deposition of TexCare SRN 260 Terra, water absorption of the dried fabric increases strongly.

Recommended Applications

TexCare SRN 260 Terra can be used in all kinds of liquid detergent formulations, e.g. heavy duty-, color and fine fabric detergents. In particular, TexCare SRN 260 Terra shows improved stability against hydrolysis at higher pH values than other TexCare grades.

TexCare SRN 260 Terra can also be formulated into fabric softeners together with cationic surfactants. In addition, TexCare SRN 260 Terra may be applied in liquid hard surface cleaners.

Formulation advice

TexCare SRN 260 Terra is compatible with most common surfactant systems. Due to its partially hydrophobic nature, slight turbidities might occur when adding TexCare SRN 260 Terra to a formulation. In this case, it might help to reduce the soap content of the formulation, add additional solvent (e.g. propylene glycol) or switch to the more hydrophilic TexCare SRN 170 SG Terra.

In some cases, most notably when TexCare SRN 260 Terra has become turbid itself, turbidity may remain upon formulation. Typically this turbidity can be removed by brief heating and stirring of the formulation at around 40 to 50°C. Alternatively TexCare SRN 260 Terra can be pre-blended at around 40 to 50°C with a nonionic surfactant, such as Genapol LA 070, before preparing the final detergent formulation.

Publisher
Rothausstrasse 61
4132 Muttenz
Switzerland

Copyright ©
Clariant International Ltd, 2025

Contact
BU INDUSTRIAL & CONSUMER
SPECIALTIES
www.ics.clariant.com
www.clariant.com

Storage and Shelf Life

TexCare SRN 260 Terra can be stored for at least 2 years in original sealed containers at room temperature under the recommended conditions.

The clear solution can become slightly turbid or form a slight precipitation but this is typical for a water-soluble polyester and does not affect the efficiency of the product. At lower temperatures the solution becomes slightly turbid or crystallizes but this is reversible upon warming. The product should be homogenized before use.

Feedstock Provenance

TexCare SRN 260 Terra is derived from plant based polyalkylethylene glycol. The renewable carbon index of TexCare SRN 260 Terra is approximately 80%.

Safety

Further information on handling, storage and dispatch is given in the material safety data sheet.

Publisher
Rothausstrasse 61
4132 Muttenz
Switzerland

Copyright ©
Clariant International Ltd, 2025

Contact
BU INDUSTRIAL & CONSUMER
SPECIALTIES
www.ics.clariant.com
www.clariant.com

This information corresponds to the present state of our knowledge and is intended as a general description of our products and their possible applications. Clariant makes no warranties, express or implied, as to the information's accuracy, adequacy, sufficiency or freedom from defect and assumes no liability in connection with any use of this information. Any user of this product is responsible for determining the suitability of Clariant's products for its particular application.* Nothing included in this information waives any of Clariant's General Terms and Conditions of Sale, which control unless it agrees otherwise in writing. Any existing intellectual/industrial property rights must be observed. Due to possible changes in our products and applicable national and international regulations and laws, the status of our products could change. Material Safety Data Sheets providing safety precautions, that should be observed when handling or storing Clariant products, are available upon request and are provided in compliance with applicable law. You should obtain and review the applicable Material Safety Data Sheet information before handling any of these products. For additional information, please contact Clariant.

*For sales to customers located within the United States and Canada the following applies in addition:
NO EXPRESS OR IMPLIED WARRANTY IS MADE OF THE MERCHANTABILITY, SUITABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE OF ANY PRODUCT OR SERVICE.

© 2022 Clariant International Ltd,
Rothausstrasse 61, 4132 Muttenz, Switzerland

